


# MINERALE CHEVRON

Home / Herringbone, Chevron & Panels / Minerale Chevron



THE  
HARDWOOD  
FLOOR CO.

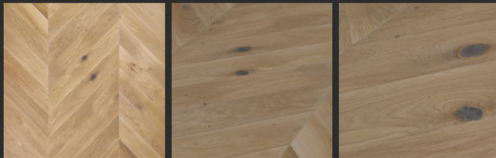

## PRODUCT DETAILS

After a short stay in our smokehouse just to diffuse the brown tannin of the wood, a ground coat of white oil 5 is applied with a transparent hardwax oil to finish. Simple but extremely effective, it has the appearance of a warm, worn floor without the distressing.

**Species:** European Oak (*Quercus Petraee*)

**Patterns:** Chevron 45° / Chevron 60° / Herringbone 90°

**Thickness:** 15/4mm; 20/6mm

**Widths:** 85 / 100 / 120 / 140mm

**Lengths:** 600 / 700 / 800mm

**Construction:** Engineered

**Profile:** T&G

**Moisture Content:** KD 7-9%

**Edges:** Micro bevel on all 4 sides (GO4)

**Grade:** Rustic Markant (no sap), Nature (others available on request)

**Finish:** Flat Sanded, Light Smoked, UV Hardwax White Oil

